

2.4GHz/5GHz WiFi + Bluetooth Combination Module

Designed for WLAN/BT and Low-Energy Communications

Model: WSD377



KEY FEATURES

- Qualcomm Atheros QCA9377
- Single-die wireless local area network (WLAN) and Bluetooth (BT) combination solution
- Supports 1x1 IEEE 802.11b/g/n at 2.4GHz
- Supports 1x1 IEEE 802.11a/n/ac at 5GHz
- Provides a highly integrated WLAN system-on-chip (SoC) for 5 GHz 802.11ac, or 2.4 GHz/5 GHz 802.11n WLAN applications
- Supports Bluetooth 4.2 + HS, BLE, and ANT+ and backward compatibility with BT 1.x and BT 2.x + Enhanced Data Rate
- Supports 20/40MHz at 2.4GHz and supports 20/40/80MHz at 5GHz
- Supports multiuser MIMO
- Supports BT-WLAN coexistence and ISM-LTE coexistence
- Supports Dynamic Frequency Selection (DFS)

Specifications

Chipset	QCA9377
Device Variant	QCA9377-3
System Memory	OTP
Host Interface	SMT Pin
WLAN Host Interface	Low-power SDIO 3.0
Bluetooth Host Interface	UART/PCM
Operating Voltage	3.3V DC power supply and I/O supply of 1.8V or 3.3V
WLAN Frequency Range	2.412 ~ 2.472 GHz 5.180 ~ 5.825 GHz
Bluetooth Frequency Range	2.4 ~ 2.4835 GHz
Power Consumption	3.83W (Max)
Modulation Techniques	CCK, OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Temperature Range	Operating: -20°C to 70°C Storage: -40°C to 90°C
Humidity	Operating: 5% to 95% (non-condensing) Storage: Max. 90% (non-condensing)
Dimensions (W x H x D)	12mm x 12mm x 2.5mm

RF Performance Table for 2.4GHz

	Data Rate	TX Power	Tolerance
2.4GHz 802.11b	1Mbps	16dBm	±2dB
	11Mbps	16dBm	±2dB
2.4GHz 802.11g	6Mbps	15dBm	±2dB
	54Mbps	13dBm	±2dB
2.4GHz 802.11n 20MHz	MCS 0	14dBm	±2dB
	MCS 7	13dBm	±2dB
	MCS 8	13dBm	±2dB
2.4GHz 802.11n 40MHz	MCS 0	14dBm	±2dB
	MCS 9	13dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	-97dBm	±2dB
	11Mbps	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	-92dBm	±2dB
	54Mbps	-76dBm	±2dB
2.4GHz 802.11n 20MHz	MCS 0	-92dBm	±2dB
	MCS 7	-75dBm	±2dB
	MCS 8	-71dBm	±2dB
2.4GHz 802.11n 40MHz	MCS 0	-89dBm	±2dB
	MCS 9	-67dBm	±2dB

RF Performance Table for 5GHz

	Data Rate	TX Power	Tolerance
5GHz 802.11a	6Mbps	11dBm	±2dB
	54Mbps	10dBm	±2dB
5GHz 802.11n/ac 20MHz	MCS 0	11dBm	±2dB
	MCS 7	7dBm	±2dB
5GHz 802.11n/ac 40MHz	MCS 0	10dBm	±2dB
	MCS 7	6dBm	±2dB
	MCS 8	6dBm	±2dB
5GHz 802.11n/ac 80MHz	MCS 0	9dBm	±2dB
	MCS 9	6dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	-92dBm	±2dB
	54Mbps	-75dBm	±2dB
5GHz 802.11n/ac 20MHz	MCS 0	-92dBm	±2dB
	MCS 7	-74dBm	±2dB
5GHz 802.11n/ac 40MHz	MCS 0	-89dBm	±2dB
	MCS 7	-72dBm	±2dB
	MCS 8	-70dBm	±2dB
5GHz 802.11n/ac 80MHz	MCS 0	-86dBm	±2dB
	MCS 9	-62dBm	±2dB

Dimensional Drawing

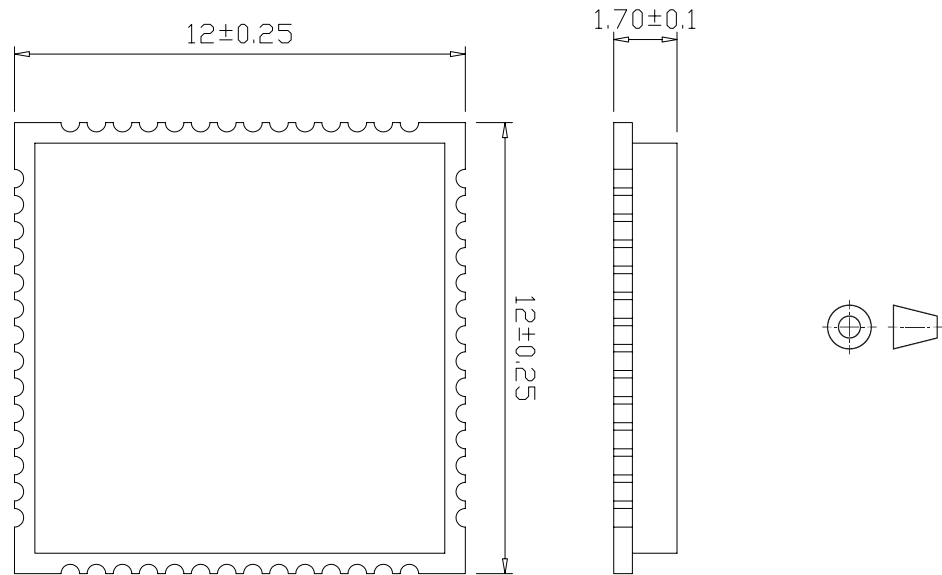

Ordering Configuration

Item Code	Status	Processor
WSD377 7A0000-TE	Sample	QCA9377

Packaging Information

Packaging Type	Dimensions	Weight	Dimensional Weight
Packing Box (50 units)	385 x 207 x 76 mm	TBD	TBD