

MEA-2400-MM

2.4 GHz ISM Magnetic Mount antenna
Part #: 100-00173-01

Description

The MEA-2400-MM Magnet Mount Antenna is a low profile antenna solution, with a very high-performance ideal for maintaining constant network connectivity. The MEA-2400-MM covers all 2.4 GHz ISM standard frequencies. This is an ideal antenna for telematics systems, remote surveillance, asset tracking and any IOT WIFI system applications. The high performance and low profile make this antenna ideal for the most challenging installations. This magnet mount antenna is easy to install with maximum durability offering IP67 rated housing and anti-rotation mounting. The MEA-2400-MM has one cable with a SMA-Male standard connector, 3m standard cable length and is fully customizable by offering additional connector types, cable lengths and cable types.


Electrical Specifications

Parameter	Specification
Frequency Range	2410-2490 MHz
Band	2.4 GHz
Return Loss	-15.5 dB
VSWR	1.4:1
Efficiency	56.5%
Peak Gain	3.8 dBi
Average Gain	-2.5 dB
Impedance	50 Ω
Polarisation	Linear
Radiation Pattern	Omni-Directional
Max. Input Power	25 W

Mechanical Specification

Parameter	Specification
Antenna Dimensions	Ø 54 × 14.7 mm
Operating Temperature	-40°C to 85°C
Connector Type	SMA-Male Standard
Mounting Type	Magnet Mount
Random	PC+ASA
Radome color	Black
Substance Compliance	RoHS
Certificates	IP67, IP69K

*Mounted on Ground Plane of 30 x 30 cm




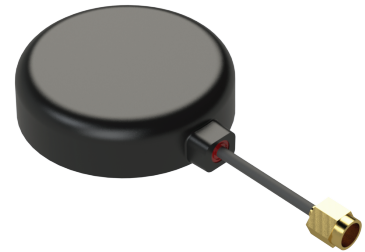


Features

- 2.4 GHz ISM Band
- Magnetic Mount
- 3.8 dBi WIFI Peak Gain
- Customizable Cable and Connector
- Ultra rugged housing
- Dimensions Ø 54 × 14.7 mm
- IP67, IP69K

Applications

- WiFi applications
- Navigation and telematics systems
- IOT
- Automotive connectivity
- Multimedia
- Fleet management
- HD video and audio streaming

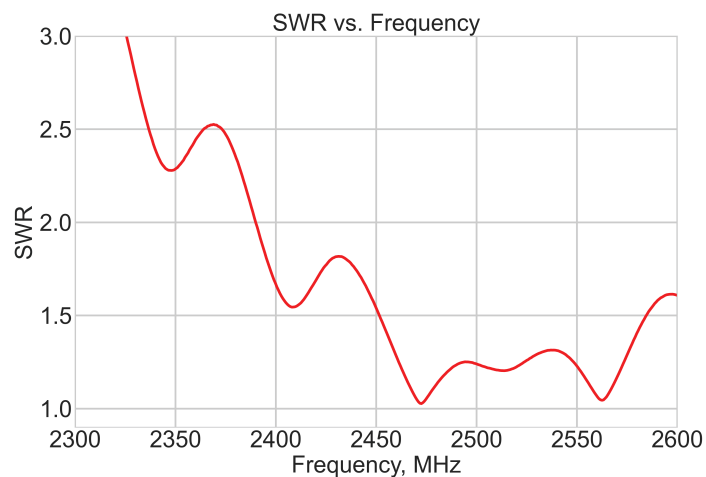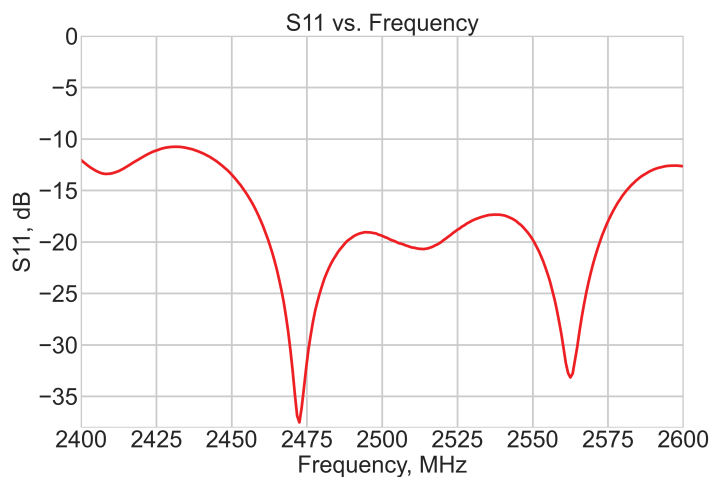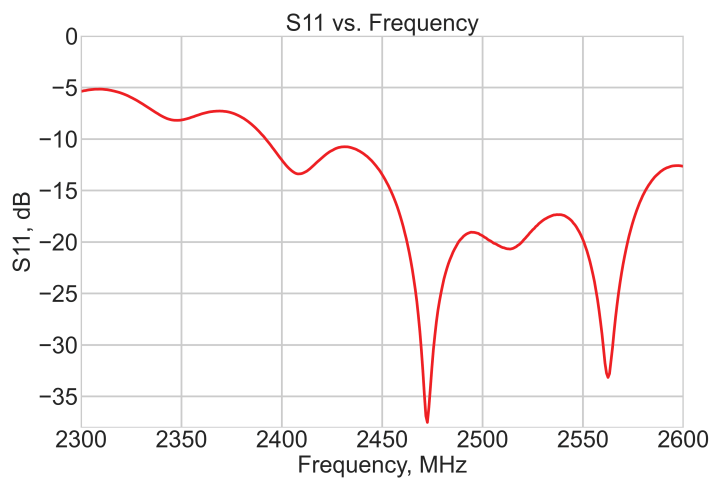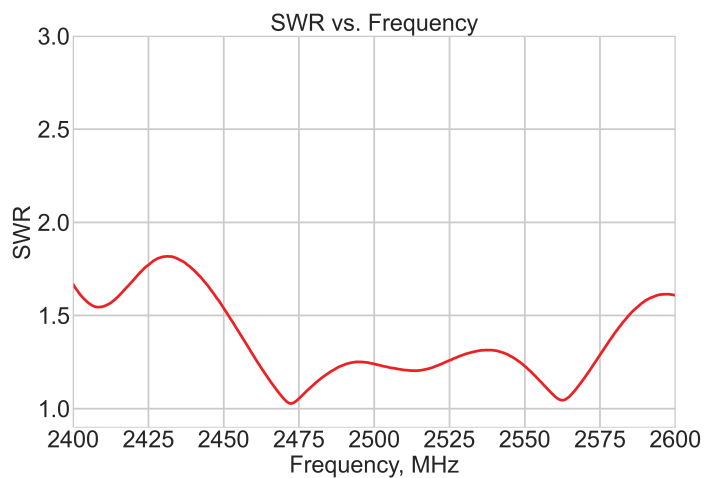

Maxtena Inc.
 7361 Calhoun Place, Suite 102
 Rockville, MD 20855
 1-877-629-8362
info@maxtena.com
www.maxtena.com

